



“

TRUCK SPREADERS & ACCESSORIES

MORE JOBS.
DONE FASTER.





RISE TO NEW CHALLENGES

WHETHER OR NOT THEY HAPPEN DURING REGULAR BUSINESS HOURS

- 6-11** SPREADER SERIES
- 12-15** TAILGATE SERIES
- 16-17** WALK-BEHIND / STORAGE
- 18-23** ACCESSORIES / SPECS

When snow and ice control is your profession, it's up to you to keep the world moving through winter's worst. Less time worrying about your equipment means more time keeping your lots free of snow and ice.

The ticking clock controls your paycheck. Minutes wasted are dollars lost. When your schedule is packed and your budget even tighter, the only thing worth your hard-earned money is *better results*.

That's why Western Products builds efficiency into every feature of our spreaders and plows. With over 70 years of experience behind us, Western Products knows what it takes to conquer all the depths of winter.

Mother Nature may not offer guarantees—but we build a promise into every piece of equipment we make:

MORE JOBS. DONE FASTER.

PURPOSE-BUILT FOR YOUR OPERATION

When the temperature drops and ice threatens, be prepared with the right tool for the job. Western Products offers a full line of ice control equipment and accessories to ensure your operation has the best solution for your vehicle fleet and the properties you service.



HOPPERS

If you provide large properties with de-icing services and have access to bulk de-icing materials, a hopper spreader is the option for you.

VEHICLE APPLICATION

Hopper spreaders are compatible with half-ton up to Class 6 work trucks.

DE-ICING MATERIAL

Choose the right tool for the job with the HELIXX™ auger optimized for spreading rock salt, or a pintle chain conveyor for dense materials like sand or salt & sand mix.

HOPPER CONSTRUCTION

Choose either rugged stainless steel or durable, lightweight polyethylene.

TAILGATES

If you're providing de-icing services to small, congested properties or outfitting your supervisor trucks, a tailgate spreader is the option for you.

DE-ICING MATERIAL

Tailgates are best for spreading bagged de-icing materials like calcium flakes.

VEHICLE APPLICATIONS

Treat congested and compact areas with tailgate spreaders on 1-ton or smaller pickups with a variety of mounting options.

SPREAD PATTERN

The broadcast spread pattern distributes de-icing materials evenly across a range of widths.

“ RIGHT TOOL FOR THE JOB.

It's your job to make sure the world keeps moving—and to do that, you need ice control equipment you can rely on. The all-new line of MARAUDER™ hopper spreaders offers a wide variety of models and sizes, all engineered to get the job done right. When treating large properties with bulk material, a WESTERN® hopper spreader is the choice for you.



MATERIAL DELIVERY SYSTEM

Choose the best material delivery system for your operation based on the de-icer you commonly use—either the all-new HELIXX™ shaftless auger for precise rock salt application or the pintle chain conveyor that's perfect for thick, heavy de-icing materials. Whatever choice you make, you'll get the delivery performance you demand.



HOPPER GEOMETRY

The hopper tub geometry is designed to optimize material flow. This allows for a smoother, even flow that prevents materials from getting stuck.



HOPPER CONSTRUCTION

Stainless steel or polyethylene construction allows you to choose the material that best suits your vehicle fleet.



STANDARD LIDS

The polyethylene models come standard with lids featuring molded channels for moisture run off. Pockets at the end of the lid allow a 2x4 or shovel to be inserted for leverage while opening and closing.



HOPPER SERIES

FEATURING THE MARAUDER™ SPREADERS

MARAUDER™

STAINLESS STEEL HOPPER SPREADERS



0.7 CU YD

S070C | S070A

1.5 CU YD

S150C | S150A

2.2 CU YD

S220C | S220A

3.0 CU YD

S300C | S300A

4.0 CU YD

S400C | S400A

5.0 CU YD

S500C | S500A

| FEATURES | DESCRIPTION | FEATURES | DESCRIPTION | FEATURES | DESCRIPTION |
|--|--|--|--|--|--|
| CAPACITY | 0.7 cu yd | CAPACITY | 1.5 cu yd | CAPACITY | 2.2 cu yd |
| CAPACITY WITH EXTENSION COLLAR* | 1.2 cu yd | CAPACITY WITH EXTENSION COLLAR* | 2.0 cu yd | CAPACITY WITH EXTENSION COLLAR* | 2.7 cu yd |
| CONSTRUCTION | Stainless Steel | CONSTRUCTION | Stainless Steel | CONSTRUCTION | Stainless Steel |
| MATERIAL DELIVERY SYSTEM | <p>HELIXX™ Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> | MATERIAL DELIVERY SYSTEM | <p>HELIXX Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> | MATERIAL DELIVERY SYSTEM | <p>HELIXX Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> |
| ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Extension Collars, Spill Guard, Ratchet Tie-Down Kit, Central Point Grease Kit (S070C only), Vibrator, Inverted V, License Plate Kit, LED Strobe Light Kit, LED Work Light Kit | ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Extension Collars, Spill Guard Kit, Central Point Grease Kit (S150C only), Pullover Tarp Kit, Ratchet Tie-Down Kit, Chain Tie-Down Kit, Vibrator, Inverted V (Accessory for S150C, standard on S150A), LED Work Light Kit, LED Strobe Light Kit | ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Extension Collars, Spill Guard Kit, Central Point Grease Kit (S150C only), Pullover Tarp Kit, Ratchet Tie-Down Kit, Chain Tie-Down Kit, Vibrator, Inverted V (Accessory for S150C, standard on S150A), LED Work Light Kit, LED Strobe Light Kit |
| VEHICLE COMPATIBILITY | 1/2-Ton Pickup Trucks | VEHICLE COMPATIBILITY | 3/4- & 1-Ton Pickup Trucks | VEHICLE COMPATIBILITY | 3/4- & 1-Ton Pickup Trucks |
| MIN. RECOMMENDED BED LENGTH | 44" | MIN. RECOMMENDED BED LENGTH | 76" | MIN. RECOMMENDED BED LENGTH | 90" |

| FEATURES | DESCRIPTION | FEATURES | DESCRIPTION | FEATURES | DESCRIPTION |
|--|--|--|---|--|---|
| CAPACITY | 3.0 cu yd | CAPACITY | 4.0 cu yd | CAPACITY | 5.0 cu yd |
| CAPACITY WITH EXTENSION COLLAR* | 4.0 cu yd | CAPACITY WITH EXTENSION COLLAR* | 5.0 cu yd | CAPACITY WITH EXTENSION COLLAR* | 6.0 cu yd |
| CONSTRUCTION | Stainless Steel | CONSTRUCTION | Stainless Steel | CONSTRUCTION | Stainless Steel |
| MATERIAL DELIVERY SYSTEM | <p>HELIXX™ Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> | MATERIAL DELIVERY SYSTEM | <p>HELIXX Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> | MATERIAL DELIVERY SYSTEM | <p>HELIXX Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> |
| ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Extension Collars, Spill Guard Kit, Central Point Grease Kit (S300C only), Ratchet Tie-Down Kit, Chain Tie-Down Kit, Vibrator, LED Work Light Kit, LED Strobe Light Kit | ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Extension Collars, Spill Guard Kit, Central Point Grease Kit (S400C only), Ratchet Tie-Down Kit, Chain Tie-Down Kit, Vibrator, LED Work Light Kit, LED Strobe Light Kit | ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Extension Collars, Spill Guard Kit, Central Point Grease Kit (S500C only), Ratchet Tie-Down Kit, Chain Tie-Down Kit, Vibrator, LED Work Light Kit, LED Strobe Light Kit |
| VEHICLE COMPATIBILITY | Dump Body or Flatbed Trucks (Over 15,000 lb GVWR) | VEHICLE COMPATIBILITY | Dump Body or Flatbed Trucks (Over 15,000 lb GVWR) | VEHICLE COMPATIBILITY | Dump Body or Flatbed Trucks (Over 15,000 lb GVWR) |
| MIN. RECOMMENDED BED LENGTH | 90" | MIN. RECOMMENDED BED LENGTH | 96" | MIN. RECOMMENDED BED LENGTH | 96" |

* Requires extension collar accessory (#85699 adds 0.5 cu yd to 0.7 cu yd model; #93980 adds 0.5 cu yd for 1.5 & 2.2 cu yd models; #93985 adds 1.0 cu yd for 3.0, 4.0, & 5.0 cu yd models)

MARAUDER™

POLY HOPPER SPREADERS



1.5 CU YD

P150C | P150A

| FEATURES | DESCRIPTION | FEATURES | DESCRIPTION |
|------------------------------------|--|------------------------------------|---|
| CAPACITY | 1.5 cu yd | CAPACITY | 2.2 cu yd |
| CONSTRUCTION | Polyethylene | CONSTRUCTION | Polyethylene |
| MATERIAL DELIVERY SYSTEM | <p>HELIXX™ Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> | MATERIAL DELIVERY SYSTEM | <p>HELIXX Auger Technology features a patented corkscrew material delivery system that is optimized to operate in the target range for rock salt spreading best practices.</p> <p>Pintle Chain Conveyor delivers reliable, smooth, and consistent material flow for heavy, dense materials while reducing bridging.</p> |
| INTERLOCKING LIDS | Standard | INTERLOCKING LIDS | Standard |
| ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Central Point Grease Kit (P150C only), Vibrator, Inverted V (Accessory for P150C, standard on P150A), LED Work Light Kit, LED Strobe Light Kit | ACCESSORIES | Tri-Shield Pre-Wet & Liquid Application System, Rearview Material Monitoring Camera, Central Point Grease Kit (P150C only), Vibrator, Inverted V (Accessory for P150C, standard on P150A), LED Work Light Kit, LED Strobe Light Kit |
| VEHICLE COMPATIBILITY | 3/4- & 1-Ton Pickup Trucks | VEHICLE COMPATIBILITY | 3/4- & 1-Ton Pickup Trucks |
| MIN. RECOMMENDED BED LENGTH | 74" | MIN. RECOMMENDED BED LENGTH | 90" |

S = Stainless Steel P = Polyethylene Number = Capacity A = Auger C = Chain

2.2 CU YD

P220C | P220A

TRI-SHIELD PRE-WET & DIRECT LIQUID APPLICATION


More jobs can be done even faster with the Tri-Shield Pre-Wet & Direct Liquid Application system. Spread, pre-wet, and spray with one tool that easily attaches to your MARAUDER™ hopper spreader, allowing you to maximize your salt usage and deliver better service.

| CONFIGURATION | 50 GALLON | 200 GALLON | 300 GALLON |
|------------------------------|---|---|---|
| TANKS | 2 @ 25 gallons | 4 @ 50 gallons | 4 @ 50 gallons 2 @ 50 gallons expansion |
| VEHICLE COMPATIBILITY | 0.7, 1.5, and 2.2 cu yd MARAUDER hopper spreaders | 3.0, 4.0 or 5.0 cu yd MARAUDER hopper spreaders | 3.0, 4.0 or 5.0 cu yd MARAUDER hopper spreaders |
| VEHICLE APPLICATIONS | ¾ and 1-ton vehicles | Larger flatbed vehicles | Larger flatbed vehicles |



DIRECT LIQUID APPLICATION & PRE-WET CAPABILITIES

The Tri-Shield system features two nozzles at the base of the chute for direct liquid application and a drip tube in the pre-wet chamber to treat and coat the granular material before it hits the broadcast spinner.

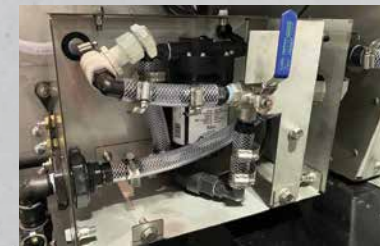

7 GALLONS PER MINUTE

Suitable for either pre-wetting granular material or spraying a direct application, a 12-volt motor and pump combination provide a consistent spray rate for low maintenance and reliable performance.



MANUAL CONTROL VALVE

A manual lever on the pump box allows the operator to easily switch between pre-wet or direct liquid application mode when the accessory system is active.



INTEGRATED CONTROL

Reduce cab clutter and operator proficiency by using the on/off accessory control that is seamlessly integrated into the MARAUDER spreader control.



TAILGATE SERIES

THE **LOW-PRO 300 & 300G, LOW-PRO 300W, PRO-FLO™ 525 & 900**
AND **LOW PROFILE 500, 1000 & 2500** SPREADERS

“ CONSIDER THE **JOB DONE.** ”

When frigid temperatures are in the forecast, your operation has to be ready for a battle with icy conditions. For small properties, touch-up jobs, and sensitive areas, tailgate spreaders are the answer. Easy to fill with a variety of bagged de-icers, tailgate spreaders effortlessly attach with a variety of mount options and leave the bed of your truck free to haul other needed equipment.



CONSERVE SPACE

By mounting the spreader on the tailgate of your truck, the entire truck bed is left free to haul bags of extra de-icing material or equipment.



MOUNTING CHOICES*

A wide variety of mounting choices allow you to select the model that best works with your vehicle fleet.



POLYETHYLENE CONSTRUCTION

High-quality polyethylene construction stands up to the cold and corrosive environment of icy conditions. Molded in our Madison Heights, MI facility, Western Products controls the quality of our tubs to ensure performance when it's needed.



**See the Mounts Guide on Page 20 for mount options and compatibility.*



LOW-PRO 300 & 300G

POLY TAILGATE SPREADERS

| FEATURES | DESCRIPTION | FEATURES | DESCRIPTION |
|---------------------------------|--|---------------------------------|---|
| CAPACITY | 3.00 cu ft | CAPACITY | 3.00 cu ft |
| CONSTRUCTION | Polyethylene | CONSTRUCTION | Polyethylene |
| MATERIAL DELIVERY SYSTEM | 2.50" x 5.75" Steel Vertical Auger | MATERIAL DELIVERY SYSTEM | 2.50" x 5.75" Steel Vertical Auger |
| CONTROL | Dual Variable-Speed Control (Included) | CONTROL | Wireless Control (Included) |
| SPREAD WIDTH | 25' | SPREAD WIDTH | 25' |
| STANDARD FEATURES | Clear Weather Cover (300) Electric Gate, Clear Weather Cover (300G) | STANDARD FEATURES | Clear Weather Cover |
| ACCESSORIES | N/A | ACCESSORIES | Wireless Vehicle Harness |
| INCLUDED MOUNTS | Receiver Hitch Mount | INCLUDED MOUNTS | Receiver Hitch Mount |
| MOUNTS SOLD SEPARATELY | 3-Point Mount, Utility Mount, Drop Utility Mount | MOUNTS SOLD SEPARATELY | 3-Point Mount, Utility Mount, Drop Utility Mount |
| MATERIAL COMPATIBILITY | Bagged Rock Salt (300) Bagged Ice Melters, Calcium Flakes, Calcium Chloride Pellets & Bagged Rock Salt (300G) | MATERIAL COMPATIBILITY | Bagged Rock Salt |



LOW-PRO 300W

POLY TAILGATE SPREADER



PRO-FLO™ 525 & 900

POLY TAILGATE SPREADERS

| FEATURES | DESCRIPTION | FEATURES | DESCRIPTION |
|---------------------------------|--|---------------------------------|---|
| CAPACITY | 5.25 cu ft & 9.00 cu ft | CAPACITY | 5.00 cu ft, 8.00 cu ft & 8.50 cu ft |
| CONSTRUCTION | Polyethylene | CONSTRUCTION | Polyethylene |
| MATERIAL DELIVERY SYSTEM | 3" x 14" Heavy-Duty Steel Horizontal Auger (525) 3" x 20" Heavy-Duty Steel Horizontal Auger (900) | MATERIAL DELIVERY SYSTEM | 2.63" x 6" Steel Vertical Auger |
| CONTROL | Dual Variable-Speed Control (Included) | CONTROL OPTIONS | Basic On/Off Control (Sold Separately) Dual Variable-Speed Control (Sold Separately) |
| SPREAD WIDTH | 30' (525) 40' (900) | SPREAD WIDTH | 30' |
| STANDARD FEATURES | Inverted-V & Vibrator; Molded Lid & Top Screen | STANDARD FEATURES | Top Screen (1000) Adjustable Feedgate, Adjustable Deflector (2500) |
| ACCESSORIES | Material Control Tube, Work Light | ACCESSORIES | Top Screen, Adjustable Deflector, 5-Flight Auger (500) Adjustable Deflector, 5-Flight Auger (1000) Top Screen, 5-Flight Auger (2500) |
| INCLUDED MOUNTS | 2" Receiver Hitch and 3-Point Tractor Mount Combo (525) | INCLUDED MOUNTS | 2" Receiver Hitch (500 & 2500) |
| MOUNTS SOLD SEPARATELY | Universal Pivot Mount, 3-Point Mount, 2" Receiver Mount and Adapter (900) | MOUNTS SOLD SEPARATELY | 2" Receiver Mount, SWING AWAY® Mount, Fixed Mount (1000) |
| MATERIAL COMPATIBILITY | Bagged Rock Salt | MATERIAL COMPATIBILITY | Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes* & Calcium Chloride Pellets* |



LOW PROFILE 500, 1000 & 2500

POLY TAILGATE SPREADERS

*May require 5-flight Auger Accessory to work with finer materials

LEAVE NO JOB UNFINISHED.

WESTERN® walk-behind spreaders deliver professional, hassle-free performance. Constructed of sturdy, corrosion-free polyethylene, both the broadcast spreader and the drop spreader can handle most ice-melt materials. With pneumatic tires and a powder coated steel frame, these spreaders are built to stand up to the demands of commercial use.

WB-100B BROADCAST SPREADER

The WB-100B poly broadcast spreader is ideal for wider areas, such as driveways, courtyards, and wide walkways. 100 lb capacity.



WB-160D DROP-STYLE SPREADER

The WB-160D poly drop-style spreader is perfect for narrow walkways and keeping material out of adjacent landscape features. 160 lb capacity.



STANDARD FEATURES

- Clear Hopper Cover
- Powder Coated Steel Frame
- 13" Pneumatic Tires
- Top Screen
- 10" Molded Spinner*

*On WB-100B only.

STOP ICE IN YOUR TRACKS.

Apply liquid anti-icing before the storm to help prevent snow and ice from forming a bond with the pavement, so it's easier to scrape clean down to the surface. The SS-120 walk-behind sidewalk sprayer helps you do just that. Spray anti-icing liquid before the storm and your sidewalks will come out cleaner than ever.

SS-120 SIDEWALK SPRAYER



CAPACITY

12-gallon poly tank with easy-fill cap.

BATTERY-POWERED ELECTRIC PUMP

12-volt electric pump sprays up to one gallon per minute at 60 psi.

RECHARGEABLE BATTERY

Battery powers up to ten full tanks (120 gal) with a single charge.

HEIGHT-ADJUSTABLE NOZZLE

The height-adjustable nozzle sprays up to four feet wide.

CONVENIENT SPRAY WAND

Use the convenient spray wand with 8' coil hose to treat stairs, entryways, and other hard-to-reach places. Features a spray distance of 15'.

OVERSIZE TIRES

Large 13" pneumatic tires enhance maneuverability over ice and snow.

BRING ON-SITE STORAGE CLOSE TO THE ACTION.

STORAGE CONTAINERS

Increase the efficiency of your crews by bringing the storage of supplies, tools, and PPE closer to where they are used. Western Products helps the work get done faster with a full line of durable, weather resistant, polyethylene storage containers. Four sizes—3, 6, 12, and 18 cu ft—are available to fit your storage footprint. Molded-in fork pockets on the 6, 12, and 18 cu ft models allow for easy placement, even when fully loaded, exactly where storage is needed. To protect the contents, each storage container has a molded-in closure that can be secured with an extended shank padlock.


These versatile containers can be used for a variety of storage applications:

- Rock Salt for Winter Cleanup and Self-Servicing
- PPE and Oil Dry for Shops and Maintenance Centers
- Bulk Item Storage for Shops, Maintenance, and Work Centers

CAPACITY

The number of 50-lb bags of rock salt that can be stored in each container:

- 3 cu ft = 4 bags
- 6 cu ft = 9 bags
- 12 cu ft = 19 bags
- 18 cu ft = 28 bags

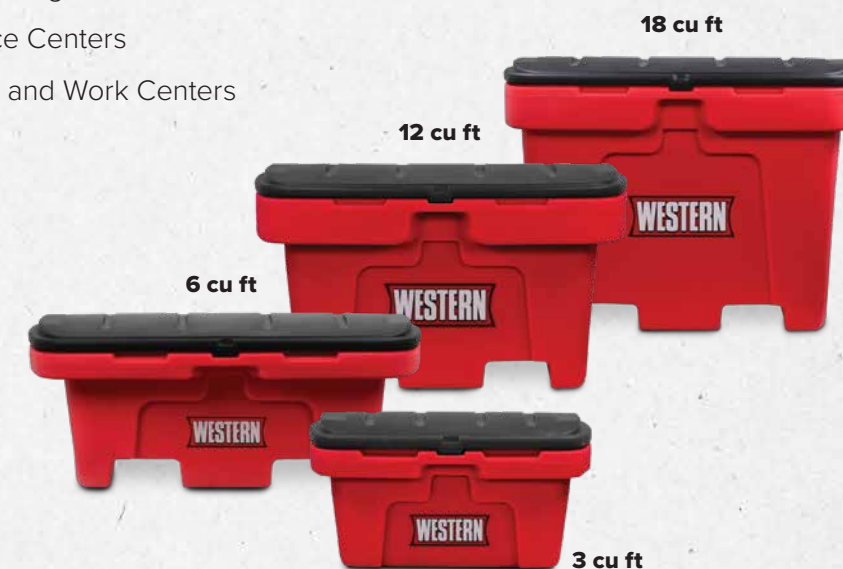

Western Products offers a limited warranty of one year on storage containers.



ACCESSORIES



PROTECT YOUR INVESTMENT WITH WESTERN® PARTS & ACCESSORIES

Ensure your WESTERN equipment remains efficient and reliable season after season with Factory. Original parts and accessories from your local WESTERN dealer. Using “will-fit” alternatives can alter your spreader’s performance and may affect your product warranty. Stick with the WESTERN brand for the parts and accessories you need. It’s the smart choice for protecting your investment.



TRI-SHIELD PRE-WET & DIRECT LIQUID APPLICATION

Activates de-icing material by applying a liquid de-icing agent directly to the material prior to it hitting the spinner, and sprays liquid brine directly onto pavement.



SPILL GUARD KIT

Provides loader with improved line of sight and prevents material overflow from off-center loading. Includes prepunched holes for addition of side extensions.



LED WORK LIGHT KIT

For better visibility at the rear of the spreader at night.



CONTROL CUP HOLDER MOUNT

Secures your controls on a flexible gooseneck mount for optimal, customizable positioning.



SPREADER CONTROL ADAPTER PLATE

Gain the flexibility and easy installation benefits of the cup holder control mount (not included).



REARVIEW MATERIAL MONITORING CAMERA

View your material input from the comfort of your cab to ensure a smooth spread pattern and optimal material output.

Consult your local WESTERN dealer or westernplows.com for accessory compatibility or availability.

TAILGATE ACCESSORIES

| | LOW-PRO 300 | LOW-PRO 300G | LOW-PRO 300W | PRO-FLO™ 525 | PRO-FLO™ 900 | LOW PROFILE 500 | LOW PROFILE 1000 | LOW PROFILE 2500 |
|--------------------------------|-------------|--------------|--------------|--------------|--------------|-----------------|------------------|------------------|
| 5-FLIGHT AUGER | X | std | std | std | std | X | X | X |
| ADJUSTABLE DEFLECTOR | std | X | X | std | std | X | X | X |
| WORK LIGHT KIT | | | | X | X | X | X | X |
| SECONDARY WORK LIGHT KIT | | | | X | X | | X | X |
| TOP SCREEN | | | | | | X | X | X |
| SPREADER CONTROL ADAPTER PLATE | | | | X | X | | | |
| CONTROL CUP HOLDER MOUNT | | | | X | X | | | |
| TRUCK PROTECTOR FLAP | | | | | | X | X | X |
| WIRELESS VEHICLE HARNESS | X | X | X | | | | | |
| MATERIAL CONTROL TUBE | | | | X | X | | | |
| UTV SPREADER CONTROL SHIELD | | | | X | X | | | |

CHAIN ACCESSORIES

| | S070C | S150C | P150C | S220C | P220C | S300C | S400C | S500C |
|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| INVERTED V | X | X | X | X | X | std | std | std |
| CHUTE EXTENSION KIT | | X | X | std | std | std | std | std |
| EXPANSION COLLAR | X | X | | X | | X | X | X |
| SPILL GUARDS | X | X | | X | | X | X | X |
| FEEDGATE KIT | | X | | X | | X | X | X |
| REARVIEW MATERIAL MONITORING CAMERA | X | X | X | X | X | X | X | X |
| TARP KIT | X | X | | X | | | | |
| ROLL TARP COVER | | | | | | X | X | X |
| CENTRAL POINT GREASE KIT | | X | X | X | X | X | X | X |
| VIBRATOR KIT | X | X | X | X | X | X | X | X |
| STROBE LIGHT KIT | X | X | X | X | X | X | X | X |
| LICENSE PLATE KIT | X | | | | | | | |
| WORK LIGHT KIT | X | X | X | X | X | X | X | X |
| SECONDARY WORK LIGHT KIT | X | X | X | X | X | X | X | X |

AUGER ACCESSORIES

| | S070A | S150A | P150A | S220A | P220A | S300A | S400A | S500A |
|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| INVERTED V | X | std | std | std | std | std | std | std |
| CHUTE EXTENSION KIT | std | X | X | std | std | std | std | std |
| EXPANSION COLLAR | X | X | | X | | X | X | X |
| SPILL GUARDS | X | X | | X | | X | X | X |
| REARVIEW MATERIAL MONITORING CAMERA | X | X | X | X | X | X | X | X |
| TARP KIT | X | X | | X | | | | |
| ROLL TARP COVER | | | | | | X | X | X |
| VIBRATOR KIT | X | X | X | X | X | X | X | X |
| STROBE LIGHT KIT | X | X | X | X | X | X | X | X |
| LICENSE PLATE KIT | X | | | | | | | |
| WORK LIGHT KIT | X | X | X | X | X | X | X | X |
| SECONDARY WORK LIGHT KIT | X | X | X | X | X | X | X | X |

MOUNT & MATERIAL COMPATIBILITY

MOUNTS GUIDE

| | LOW-PRO 300 | LOW-PRO 300G | LOW-PRO 300W | PRO-FLO™ 525 | PRO-FLO™ 900 | LOW PROFILE 500 | LOW PROFILE 1000 | LOW PROFILE 2500 |
|---------------------------------|-------------|--------------|--------------|--------------|--------------|-----------------|------------------|------------------|
| TAILGATE SPREADER MOUNTS | | | | | | | | |
| RECEIVER HITCH MOUNT | std | std | std | std | x* | std | x | std |
| FIXED MOUNT | | | | | | | x | |
| DUAL-SWING MOUNT | | | | | | | x | |
| UTILITY MOUNT | | | x | | | | | |
| DROP UTILITY MOUNT | | | x | | | | | |
| 3-POINT MOUNT | x | x | x | std | x | | | |
| PIVOT MOUNT | | | | | x | | | |

*Requires additional adapter
std = Included standard with spreader
x = Sold separately

MATERIAL GUIDE

| MATERIAL TYPE | MARAUDER™ HOPPERS | | | TAILGATES | | | | | |
|--------------------------|-------------------|--------------|--------------|-------------|-------------|-----------------|------------------|------------------|--|
| | LOW-PRO 300 | LOW-PRO 300G | LOW-PRO 300W | PRO-FLO 525 | PRO-FLO 900 | LOW PROFILE 500 | LOW PROFILE 1000 | LOW PROFILE 2500 | |
| BAGGED ICE MELTERS | | | | | | x | x | x | |
| BAGGED ROCK SALT | x | x | x | x | x | x | x | x | |
| BULK SALT | x | | | x | x | | | | |
| CALCIUM FLAKES | | x | | | | x† | x† | x† | |
| CALCIUM CHLORIDE PELLETS | | x | | | | x† | x† | x† | |
| 50/50 SALT/SAND MIX | x | | | | | | | | |
| SAND | x | | | | | | | | |

NOTE: Assumes Dry, Free-Flowing Materials
*May require use of material control tube accessory.
†May require 5-flight auger accessory.

| MATERIAL TYPE | WB-100B | WB-160D |
|--------------------------|--------------|---------|
| | WALK-BEHINDS | |
| BAGGED ICE MELTERS | x | x |
| BAGGED ROCK SALT | x | x |
| BULK SALT | x | x |
| CALCIUM FLAKES | x | x |
| CALCIUM CHLORIDE PELLETS | x | x |
| 50/50 SALT/SAND MIX | | |
| SAND | | |

| MATERIAL TYPE | SS-120 SPRAYER | PRE-WET SYSTEM |
|---------------------------|----------------|----------------|
| | WALK-BEHIND | ACCESSORY |
| BRINE | x | x |
| CALCIUM CHLORIDE SOLUTION | x | x |
| PREMIUM SOLUTIONS | x | x |

Selecting the proper de-icing materials can vary by operator preference, experience and environmental considerations. Consult your local WESTERN® dealer with questions regarding material selection and availability.

SPECIFICATIONS

MARAUDER™ Stainless Steel



| SPREADER TYPE | HOPPER | HOPPER | HOPPER | HOPPER | HOPPER | HOPPER |
|------------------------------|--|---|--|---|---|--|
| MODEL | S070C / S070A | S150C / S150A | S220C / S220A | S300C / S300A | S400C / S400A | S500C / S500A |
| BODY SIDE LENGTH | 54" (1.37 m) | 84" (2.13 m) | 96" (2.44 m) | 96" (2.44 m) | 108" (2.74 m) | 108" (2.74 m) |
| CAPACITY (VOLUME) | 0.7 cu yd (0.54 cu m) | 1.5 cu yd (1.15 cu m) | 2.2 cu yd (1.68 cu m) | 3.0 cu yd (2.29 cu m) | 4.0 cu yd (3.06 cu m) | 5.0 cu yd (3.82 cu m) |
| CAPACITY (WEIGHT) | 1,500 lb (680.39 kg) | 3,240 lb (1,470 kg) | 4,752 lb (2,155 kg) | 6,480 lb (2,939 kg) | 8,640 lb (3,919 kg) | 10,800 lb (4,899 kg) |
| HOPPER CONSTRUCTION | Riveted 16 Gauge Stainless Steel | Riveted 16 Gauge Stainless Steel | Riveted 16 Gauge Stainless Steel | Riveted 16 Gauge Stainless Steel | Riveted 16 Gauge Stainless Steel | Riveted 16 Gauge Stainless Steel |
| HOPPER DIMENSIONS | Chain: 54" x 43" x 28" (2.06 m x 1.09 m x 1.17 m) Auger: 54.5" x 42.75" x 27.25" (2.06 m x 1.09 m x 1.14 m) | 84.5" x 50" x 32" (2.14 m x 1.27 m x 0.81 m) | 96.5" x 50" x 35.75" (2.45 m x 1.27 m x 0.91 m) | 96.5" x 70" x 41" (2.45 m x 1.78 m x 1.04 m) | 108.5" x 70" x 43.75" (2.76 m x 1.78 m x 1.11 m) | 108.5" x 70" x 50.50" (2.76 m x 1.78 m x 1.28 m) |
| DIMENSIONS OVERALL | Chain: 81" x 43" x 46" (1.37 m x 1.09 m x 0.71 m) Auger: 81" x 42.75" x 45" (1.38 m x 1.09 m x 1.14 m) | Chain: 107" x 50" x 51.75" (2.71 m x 1.27 m x 1.31 m) Auger: 111.5" x 50" x 50.5" (2.83 m x 1.27 m x 1.28 m) | Chain: 119.25" x 50" x 55.50" (3.03 m x 1.27 m x 1.41 m) Auger: 123" x 50" x 50.5" (3.12 m x 1.78 m x 1.82 m) | Chain: 120.25" x 70" x 72.75" (3.05 m x 1.78 m x 1.85 m) Auger: 123" x 70" x 71.50" (3.12 m x 1.78 m x 1.82 m) | Chain: 128.75" x 70" x 75.50" (3.27 m x 1.78 m x 1.92 m) Auger: 129" x 70" x 74.25" (3.28 m x 1.78 m x 1.89 m) | Chain: 126.25" x 70" x 82.25" (3.21 m x 1.78 m x 2.09 m) Auger: 129" x 70" x 81" (3.28 m x 1.78 m x 2.06 m) |
| MIN. BED LENGTH | 44" (1.1 m) | 76" (1.93 m) | 90" (2.29 m) | 90" (2.29 m) | 96" (2.44 m) | 96" (2.44 m) |
| APPROX. WEIGHT (EMPTY)* | Chain: 420 lb (190.51 kg) Auger: 337 lb (152.9 kg) | Chain: 530 lb (240 kg) Auger: 500 lb (227 kg) | Chain: 580 lb (263 kg) Auger: 550 lb (249 kg) | Chain: 750 lb (340 kg) Auger: 700 lb (318 kg) | Chain: 820 lb (372 kg) Auger: 770 lb (349 kg) | Chain: 910 lb (413 kg) Auger: 850 lb (386 kg) |
| SPINNER SIZE | 12" Diameter (30.5 cm) | 16" Diameter (40.64 cm) | 16" Diameter (40.64 cm) | 16" Diameter (40.64 cm) | 16" Diameter (40.64 cm) | 16" Diameter (40.64 cm) |
| SPREADING WIDTH | Up to 30' (9.14 m) | Salt: 36' (10.97 m) Sand: 24' (7.32 m) | Salt: 36' (10.97 m) Sand: 24' (7.32 m) | Salt: 36' (10.97 m) Sand: 24' (7.32 m) | Salt: 36' (10.97 m) Sand: 24' (7.32 m) | Salt: 36' (10.97 m) Sand: 24' (7.32 m) |
| VEHICLE COMPATIBILITY | 1/2-Ton & Light Duty Pickup Trucks | 3/4- & 1-Ton Pickup Trucks | 3/4- & 1-Ton Pickup Trucks | Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR) | Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR) | Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR) |
| MATERIAL DELIVERY DIMENSIONS | Chain: 15.5" Wide (39.37 cm) Auger: 4" Diameter (10.2 cm) | Chain: 16" Wide (40.64 cm) Auger: 6" Diameter (15.24 cm) | Chain: 16" Wide (40.64 cm) Auger: 6" Diameter (15.24 cm) | Chain: 16" Wide (40.64 cm) Auger: 6" Diameter (15.24 cm) | Chain: 16" Wide (40.64 cm) Auger: 6" Diameter (15.24 cm) | Chain: 16" Wide (40.64 cm) Auger: 6" Diameter (15.24 cm) |

MARAUDER™ Poly



| SPREADER TYPE | HOPPER | HOPPER |
|------------------------------|---|---|
| MODEL | P150C P150A | P220C P220A |
| BODY SIDE LENGTH | 84" (2.13 m) | 96" (2.44 m) |
| CAPACITY (VOLUME) | 1.5 cu yd (1.15 cu m) | 2.2 cu yd (1.68 cu m) |
| CAPACITY (WEIGHT) | 3,240 lb (1,469.9 kg) | 4,752 lb (2,155 kg) |
| HOPPER CONSTRUCTION | Polyethylene | Polyethylene |
| HOPPER DIMENSIONS | 96.50" x 63.50" x 46" (2.45 m x 1.61 m x 1.17 m) | 104.50" x 63.50" x 51.50" (2.65 m x 1.61 m x 1.31 m) |
| DIMENSIONS OVERALL | 108.25" x 63.50" x 51.75" (2.75 m x 1.61 m x 1.31 m) | 116.25" x 63.50" x 55.50" (2.95 m x 1.61 m x 1.41 m) |
| MIN. BED LENGTH | 74" (1.88 m) | 90" (2.29 m) |
| APPROX. WEIGHT (EMPTY)* | Chain: 723 lb (328 kg) Auger: 673 lb (305.3 kg) | Chain: 823 lb (373.3 kg) Auger: 793 lb (360 kg) |
| SPINNER SIZE | 16" Diameter (40.64 cm) | 16" Diameter (40.64 cm) |
| SPREADING WIDTH | Salt: 36' (10.97 m) Sand: 24' (7.32 m) | Salt: 36' (10.97 m) Sand: 24' (7.32 m) |
| VEHICLE COMPATIBILITY | 3/4- & 1-Ton Pickup Trucks | 3/4- & 1-Ton Pickup Trucks |
| MATERIAL DELIVERY DIMENSIONS | Chain: 16" Wide (40.64 cm) Auger: 6" Diameter (15.24 cm) | Chain: 16" Wide (40.64 cm) Auger: 6" Diameter (15.24 cm) |

*Material weight equates to approximately 2,160 lb/cu yd or 80 lb/cu ft for 1 bag of rock salt.

SPECIFICATIONS



**LOW-PRO
300W**

| SPREADER TYPE | TAILGATE | |
|-------------------------------|--|--|
| MODEL | 300W | |
| CAPACITY | 3.00 cu ft (0.09 cu m) | |
| HOPPER CONSTRUCTION | Polyethylene | |
| DIMENSIONS OVERALL | 22" x 30" x 32" (55.90 cm x 76.20 cm x 81.30 cm) | |
| APPROX. WEIGHT (EMPTY) | 68 lb (30.8 kg) With Mount | |
| MOTOR | Electric, 12V 1/3 hp | |
| AUGER (DIA. x LENGTH) | — | |
| SPINNER SIZE | 10" Nylon/Glass Reinforced Resin | |
| SPREADING WIDTH | Up to 25' (7.62 m) | |
| VEHICLE APPLICATION | Tractors, UTVs, SUVs, 1-Ton or Smaller Pickups | |
| AVAILABLE MOUNTS | Standard 2" Receiver, Optional Drop Utility, Trailer Utility, 3-Point Mounts | |



**LOW-PRO
300 & 300G**

| SPREADER TYPE | TAILGATE | |
|-------------------------------|---|---|
| MODEL | 300G | 300 |
| CAPACITY | 3.0 cu ft (0.09 cu m) | 3.0 cu ft (0.09 cu m) |
| HOPPER CONSTRUCTION | Polyethylene | Polyethylene |
| DIMENSIONS OVERALL | 22" x 30" x 30" (55.9 cm x 76.2 cm x 76.2 cm) | 22" x 32" x 30" (55.9 cm x 76.2 cm x 81.3 cm) |
| APPROX. WEIGHT (EMPTY) | 75 lb (34.0 kg) | 68 lb (30.8 kg) |
| MOTOR | 12-volt DC motor mounted in weather-resistant enclosure | 12-volt DC motor mounted in weather-resistant enclosure |
| AUGER (DIA. x LENGTH) | — | 3' Vertical High-Flow Auger |
| SPINNER SIZE | 10" Nylon/Glass Reinforced Resin | 10" Nylon/Glass Reinforced Resin |
| SPREADING WIDTH | Up to 20' (6.1 m) | Up to 25' (7.6 m) |
| VEHICLE APPLICATION | UTVs, Tractors, 1-Ton or Smaller Pickups | UTVs, Tractors, 1-Ton or Smaller Pickups |
| AVAILABLE MOUNTS | Standard 2" Light-Duty Hitch Mount, Standard 2" Receiver, Optional Drop Utility, Trailer Utility, 3-Point Mount | Standard 2" Light-Duty Hitch Mount |



WB-160D



WB-100B

| SPREADER TYPE | WALK-BEHIND | |
|-------------------------------|---|---|
| CAPACITY | 160 lb (72.00 kg) | 100 lb (45.00 kg) |
| HOPPER CONSTRUCTION | Polyethylene | Polyethylene |
| DIMENSIONS OVERALL | 48" x 38.25" x 36" (121.92 cm x 97.16 cm x 91.44 cm) | 50" x 26" x 28" (127 cm x 66.04 cm x 71.12 cm) |
| APPROX. WEIGHT (EMPTY) | 55 lb (24.00 kg) | 25 lb (11.00 kg) |
| SPINNER SIZE | — | 10" (25.40 cm) |
| SPREADING WIDTH | Up to 3' (0.91 m) | Up to 20' (6.00 m) |



SS-120

| SPREADER TYPE | WALK-BEHIND | |
|---------------------------|--|--|
| EMPTY WEIGHT | 60 lb (27.20 kg) | |
| DIMENSIONS OVERALL | 48" x 28" x 33" (122.00 cm x 71.00 cm x 84.00 cm) | |
| CAPACITY | 12 gal (45.40 L) | |
| SPRAYING WIDTH | Up to 48" (122.00 cm) | |
| SPRAYING VOLUME | 1 gal/min (3.80 L/min) | |
| FRAME | Powder Coated Steel | |
| TANK | One-Piece LLDPE | |
| MOTORS | 12-Volt, Direct-Drive Pump | |



STORAGE CONTAINERS

| | STORAGE | STORAGE | STORAGE | STORAGE |
|--------------------------|-------------------|--------------------|--------------------|-------------------|
| MODEL NUMBER | 74069 | 74071 | 74073 | 74075 |
| MATERIAL CAPACITY | 3 cu ft | 6 cu ft | 12 cu ft | 18 cu ft |
| EMPTY WEIGHT | 19 lb (8.62 kg) | 35.5 lb (16.10 kg) | 50.5 lb (22.91 kg) | 58 lb (26.31 kg) |
| OVERALL LENGTH | 33" (83.82 cm) | 48" (121.92 cm) | 48" (121.92 cm) | 48" (121.92 cm) |
| OVERALL WIDTH | 22.75" (57.79 cm) | 33.25" (84.46 cm) | 33.25" (84.46 cm) | 33.25" (84.46 cm) |
| OVERALL HEIGHT | 17.4" (44.20 cm) | 20.75" (52.71 cm) | 27.75" (70.49 cm) | 35.75" (90.81 cm) |
| FORK POCKETS | No | Yes | Yes | Yes |



**PRO-FLO™
525 & 900**

| SPREADER TYPE | TAILGATE | |
|-------------------------------|---|---|
| MODEL | 525 | 900 |
| CAPACITY | 5.25 cu ft (0.15 cu m) | 9.00 cu ft (0.25 cu m) |
| HOPPER CONSTRUCTION | Polyethylene | Polyethylene |
| DIMENSIONS OVERALL | 20.50" x 38" x 34" (52.10 cm x 96.50 cm x 86.40 cm) | 24" x 52" x 36" (60.90 cm x 132.10 cm x 91.40 cm) |
| APPROX. WEIGHT (EMPTY) | 160 lb with mount (72.60 kg) | 180 lb w/o mount* (81.70 kg) |
| MOTOR | Dual Electric, 12V, 1/3 hp | Dual Electric, 12V, 1/3 hp |
| AUGER (DIA. x LENGTH) | 3" x 14" Heavy-Duty Solid Steel (7.26 cm x 35.56 cm) | 3" x 20" Heavy-Duty Solid Steel (7.26 cm x 50.80 cm) |
| SPINNER SIZE | 10" (25.40 cm) | 12" (30.50 cm) |
| SPREADING WIDTH | Up to 30' (9.14 m) | Up to 40' (12.19 m) |
| VEHICLE APPLICATION | Tractors, UTVs, SUVs, 1-Ton or Smaller Pickups | Tractors, 1-Ton or Smaller Pickups |
| AVAILABLE MOUNTS | Standard 2" Receiver, 3-Point Combo Mount | Pivot Mount, 2" Receiver Hitch (requires adapter mount), 3-Point Hitch Mount* |

**LOW PROFILE
500, 1000 & 2500**



| SPREADER TYPE | TAILGATE | | |
|-------------------------------|---|--|---|
| MODEL | 500 | 1000 | 2500 |
| CAPACITY | 5.00 cu ft (0.14 cu m) | 8.00 cu ft (0.23 cu m) | 8.50 cu ft (0.24 cu m) |
| HOPPER CONSTRUCTION | Polyethylene | Polyethylene | Polyethylene |
| DIMENSIONS OVERALL | 21" x 39" x 34" (53.34 cm x 99.06 cm x 86.40 cm) | 19.50" x 50.50" x 35" (49.53 cm x 128.27 cm x 88.90 cm) | 25" x 50" x 42" (63.50 cm x 127.00 cm x 106.68 cm) |
| APPROX. WEIGHT (EMPTY) | 75 lb with mount (34.00 kg) | 105 lb w/o mount* (47.00 kg) | 131 lb with mount (59.40 kg) |
| MOTOR | Electric, 12V, 1/3 hp | Electric, 12V, 1/3 hp | Electric, 12V, 1/3 hp |
| AUGER (DIA. x LENGTH) | 2.63" x 6" (6.68 cm x 15.24 cm) | 2.63" x 6" (6.68 cm x 15.24 cm) | 2.63" x 9" (6.68 cm x 22.86 cm) |
| SPINNER SIZE | 10" (25.40 cm) | 10" (25.40 cm) | 15" (38.10 cm) |
| SPREADING WIDTH | Up to 30' (9.14 m) | Up to 30' (9.14 m) | Up to 30' (9.14 m) |
| VEHICLE APPLICATION | Vehicles with Class III Hitch | Full-Size Trucks (over 6,000 lb GVWR) | Full-Size Trucks (over 6,000 lb GVWR) |
| AVAILABLE MOUNTS | Standard Class III 2" Receiver Hitch Mount | Optional Fixed Mount, Class IV Hitch Mount, SWING AWAY® | Standard Class IV Receiver Hitch Mount |

* Mounts sold separately

WEBSITE RESOURCES

FIND THE SPREADERS THAT BEST FIT YOUR FLEET

Much like the variety of spreading materials on the market, there are countless spreader options available. Western Products manufactures a full line of spreaders from walk-behind spreaders to bed-mounted and dump box spreaders. Find the WESTERN® spreaders that will help you get more jobs done faster at westernspreader.com.

YOUR LOCAL WESTERN DEALER IS HERE TO HELP

Call or visit your local WESTERN dealer to learn more about Western Products' full-line of professional-grade snowplows and spreaders, to inquire about product availability or installation, or ask any questions about which products would be the best fit for your job or vehicle applications. Find your local WESTERN dealer by visiting westernplows.com/dealers.

WARRANTY & REGISTRATION

Western Products offers a 2-year limited warranty on most WESTERN snow and ice control products. Register your equipment today to create a record of your purchase and receive a full range of benefits including trouble-free warranty work, serial number identification for theft protection, and promotions. Register your products by visiting westernplows.com/warranty.



Western Products | P.O. Box 245038 | Milwaukee, WI 53224-9538

westernplows.com     

Western Products reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Western Products or the vehicle manufacturer may require or recommend optional equipment for spreaders. Do not exceed vehicle ratings with a spreader. This product is manufactured under the following US patents: 7,347,390; 7,481,384 7,540,436; 9,033,265; 9,296,571; 9,757,744; 11,680,379; and other patents pending. Western Products offers a limited warranty for all spreaders. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: HELIXX™, MARAUDER™, MVP PLUS™, PRO-FLO™, SWING AWAY®, Tornado™, WESTERN®, WIDE-OUT™.

©2024 Douglas Dynamics, LLC
All rights reserved.

 A DIVISION OF DOUGLAS DYNAMICS, LLC

Printed in U.S.A.
Form No. 32595 – OCT24